

NODAGRI

FENCING FOR LARGE AREAS

Knotted fencing with differentiated meshes. The vertical (linear) and horizontal (crimped) wires of the mesh are made in zinc coated steel. For use in agricultural and breeding sectors. **Nodagri** fencing is sold in 50m or 100m rolls on pallets wrapped in recyclable polyethylene film.



H/horizontal wires/mesh cm/n°/cm	L m	roll kg each	kg/m ² each	roll/pallet n°	pallet kg each	ø selvedge mm	ø other wires mm
100-8-30	50/100	16/32	0,32	16/9	266/298	2,50	2,00
100-9-15	50/100	22/44	0,44	16/9	362/406	2,50	2,00
100-9-30	50/100	17/34	0,34	16/9	282/316	2,50	2,00
120-10-15	50/100	25/50	0,42	16/9	410/460	2,50	2,00
150-13-15	50	32	0,43	12	394	2,50	2,00
100-9-15	100	70	0,70	6	430	3,00	2,40
120-10-15	100	77	0,64	6	472	3,00	2,40
140-12-15	100	95	0,68	6	580	3,00	2,40

100/8/30






100/9/15

100/9/30

120/10/15

140/12/15

150/13/15

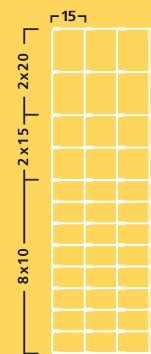

measure in cm

general characteristics	value	unit of measurement	ref. standards
vertical wires maximum unitary tensile strength	450-550*	N/mm ²	-
horizontal wires maximum unitary tensile strength	600-700*	N/mm ²	-
zinc coating type	hot dip	-	UNI-EN 10244-2
zinc purity grade (SHG)	~99,995%	-	UNI-EN 1179
zinc adherence	1 (excellent)	-	UNI-EN 10244-2
zinc coating thickness selvedge wires (min/max)	~10/~14	µm	-
zinc coating thickness vert. wires	~10	µm	-
zinc coating thickness horiz. wires	~10	µm	-
roll length tolerance	-0/+1	%	-
Ø zinc coated wire tolerance (min/max)	±0,040/±0,050	mm	UNI-EN 10218-2

(*) the values refer to the wire before construction of the mesh

Upon request, it is possible to produce mesh and wires different from the standard measurements.

